
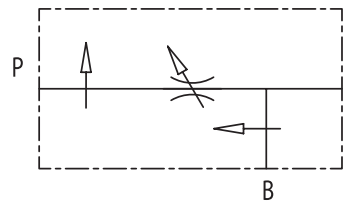



3-Wege Stromregelventil reststrombelastbar

Typ VPR3

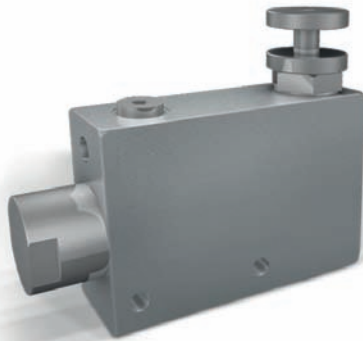


Compensation Curve (Öltemperatur: 50 °C/Ölviskosität: 30 cSt)


VPR3 3/8"

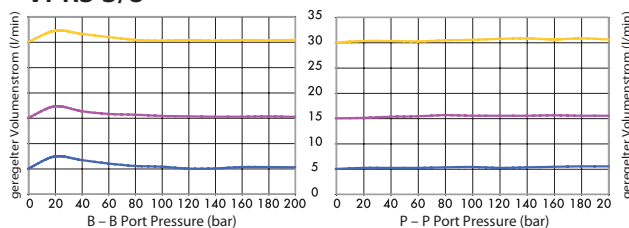


VPR3 1/2"

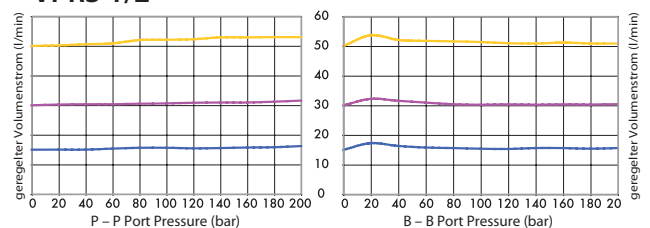


VPR3 3/4"

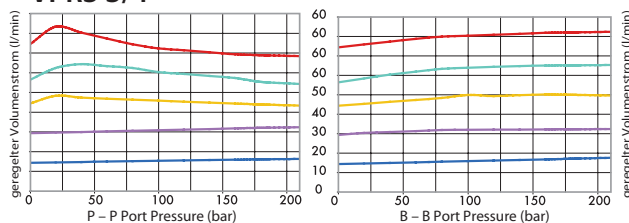

VPR3 1"

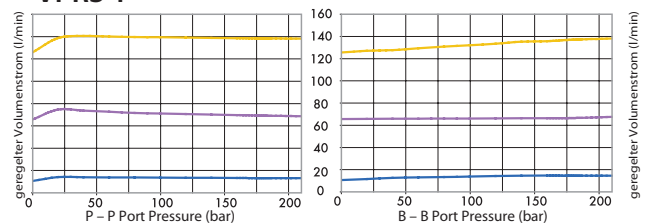

Code	Typ	max. Eingangs-Volumenstrom (l/min)	max. geregelter Volumenstrom (l/min)	max. Arbeitsdruck (bar)
V1060	VPR3 3/8"	60	50	350
V1070	VPR3 1/2"	80	60	350
V1080	VPR3 3/4"	120	100	350
V1090	VPR3 1"	200	170	350

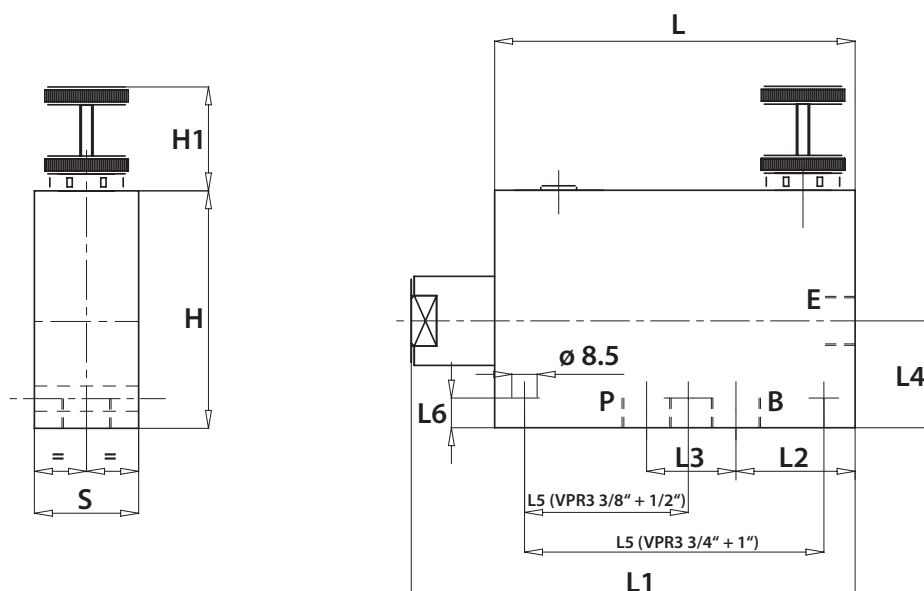

Code	Typ	E - P - B	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	H (mm)	H1 (mm)	S (mm)	Gewicht (kg)
V1060	VPR3 3/8"	G 1/4"	121	147	40	32	36	55	12	80	35	35	2.530
V1070	VPR3 1/2"	G 3/8"	121	147	37	36	36	55	12	80	35	35	2.470
V1080	VPR3 3/4"	G 1/2"	155	187	50	44	37	115	10	90	35	50	4.958
V1090	VPR3 1"	G 3/4"	155	187	46	58	47	115	12	100	35	50	5.268