


TECHNICAL DATA		
Max. pressure:	350	bar
Rated flow:	80	l/min
Cavity-Tooling:	13A-2	
Installation torque:	40-50	Nm
Weight:	0.10	kg

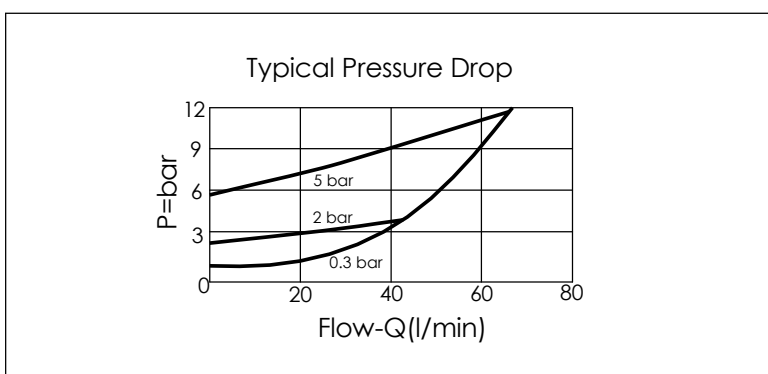

Y	SPRINGS	
	Cracking pressure	
00	0 bar (without spring)	
015	0.15 bar	
03	0.3 bar	
10	1.0 bar	
20	2.0 bar	
35	3.5 bar	
50	5.0 bar	
70	7.0 bar	

X	OPERATION	
20	1 to 2 (Free Flow)	

Z	OPTION	
N	Non-adjustable	
NP	Non-adjustable With stainless steel external metal components (Buna-N Seal)	
L	Leakproof hex. socket screw.	