

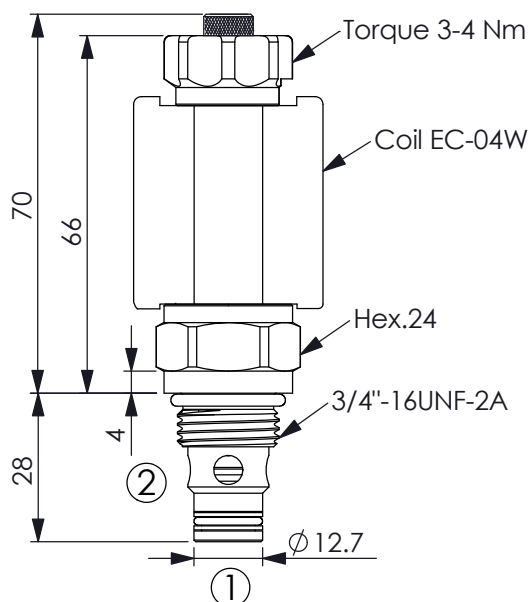



Ordering Code: **EP-08W-X-Y-Z-05**

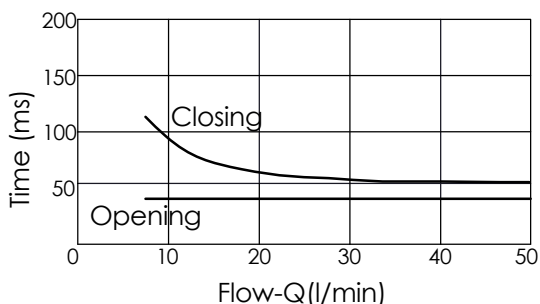

UNIT:mm

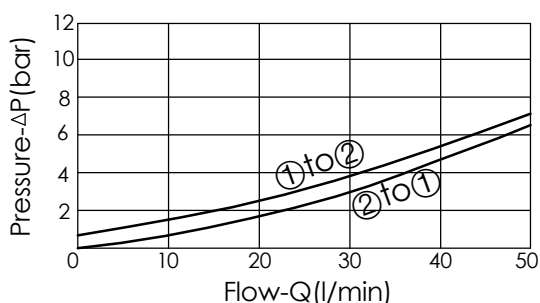

TECHNICAL DATA

Max.Operating pressure: 350 bar

Rated flow: 40 l/min

Cavity-Tooling: 08W-2

Installation torque: 39-51 Nm

Weight: 0.13 kg

Fluids-Temperatures: -40~120 °C

Internal Leakage: 0.15cc/minute

(3 drops/minute) max.at 350 bar

Filtration: 25 μm nominal or better

Minimun Voltage Required:
90 % of nominal

Coils must be ordered separately


Mounting Position: unrestricted

X STRUCTURE


2A 2 Ports 、 20 Watt. Coil

Z OPTIONS

N Non-adjustable



M Screw-out Knob Style



Y OPERATION

31 Normally-Closed Double Lock