



PRIORITY FLOW CONTROL VALVE

(Bypass/Pressure compensated)

Ordering Code: **FR-10W-X-Y-Z**

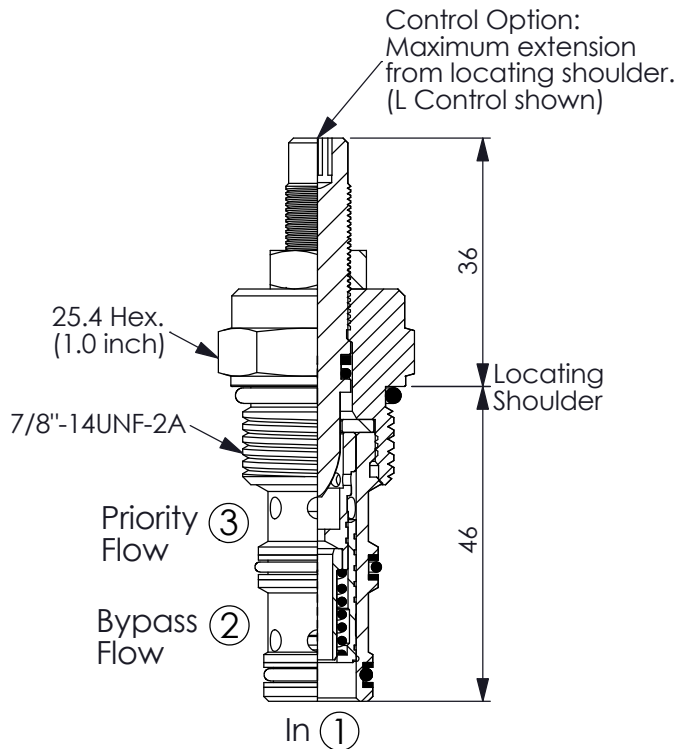

UNIT:mm

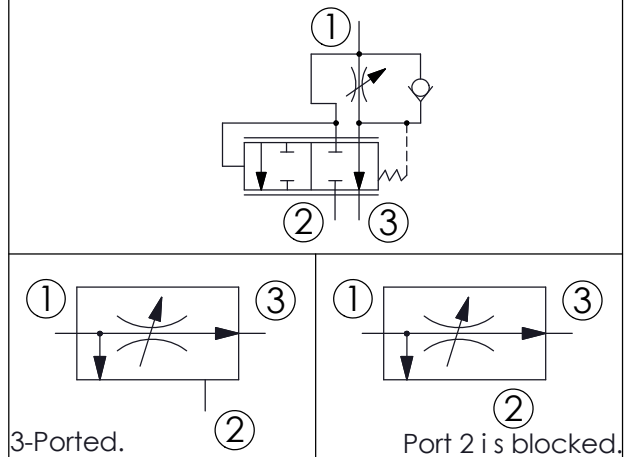

TECHNICAL DATA

Max. pressure: 240 bar


Rated Input Flow:
3-ported : 0-38 lpm nominal
0-57 lpm max.

Cavity-Tooling: 10W-3

Installation torque: 35-45 Nm

Weight: 0.14 kg

Note: It can be used as a priority-type flow regulator or a restrictive-type 2-way flow regulator when the bypass port (port 2) is blocked.

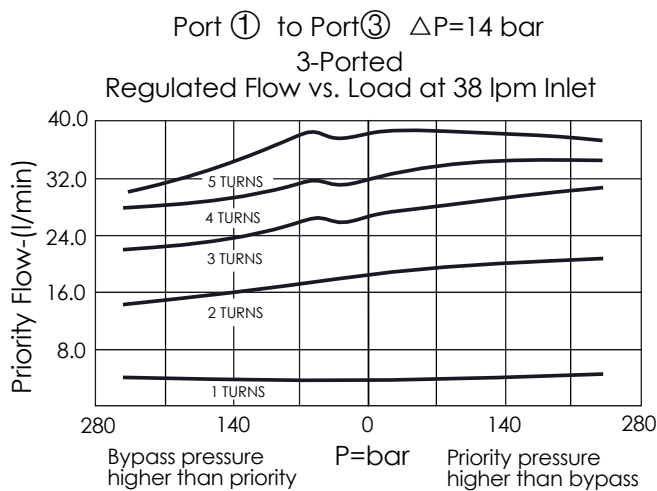

X PRIORITY FLOW RANGE

Flow Rate :
33 3-ported regulated flow 0-38 lpm
2-ported regulated flow 0-34 lpm

For Lower flow rates, see the FR-10W-31 valve

Y SPRING RANGE

N (Standard)

Z OPTIONS

L	Leakproof hex. socket screw.	
E	Handknob and locknut.	
B	Handknob and aluminum locknut.	
K	Handknob with Lock Knob.	

