

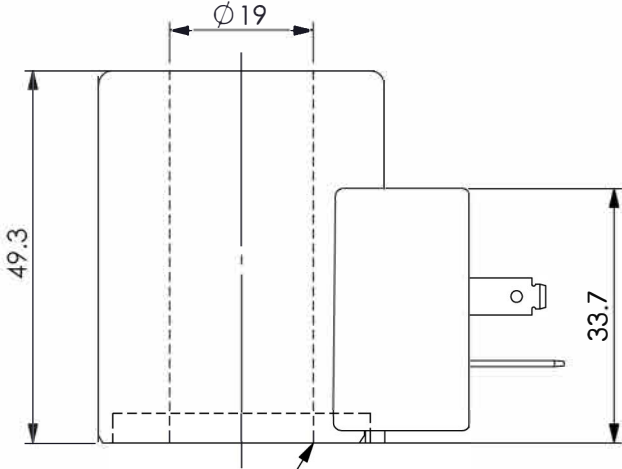


Magnetspule


Ordering Code: EC-19A-X-Y-Z

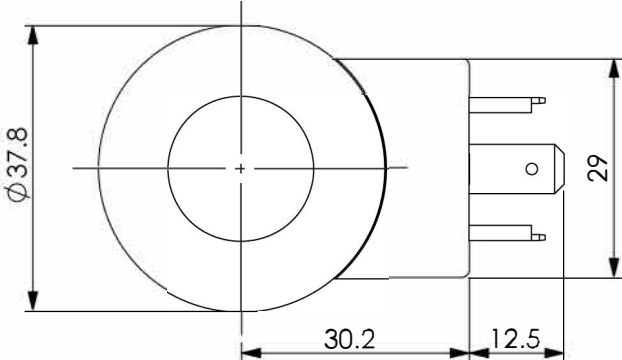

While installing, please be sure that this side is toward to the solenoid cartridge valve.



UNIT:mm

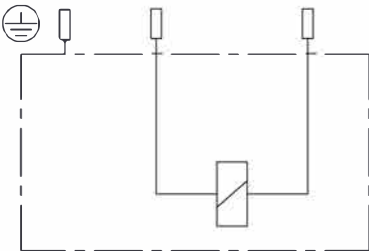

TECHNICAL DATA

Weight: 0.24 kg

HEAT INSULATION CLASS H:
356°F (180°C)

Ambient temperature range:
-22+122°F (-30+50°C)

Available on request:
Different Voltages -
Different connectors.

Inlet voltage fluctuations must not exceed ± 10% of nominal voltage to obtain correct operation and long life of coils.

Connector Environment Rating: IP65

X	Power (W)	
220	22 Watt.	

Y	Connections	
H	DIN43650-ISO4400	

Z	Voltage (V)	Resistance (Ω)	Maximum Current (Proportional Control)	
	Nominal	20~25 °C		
E	12V DC	6.4±8 %	1150 mA	
D	24V DC	26.2±5 %	590 mA	