

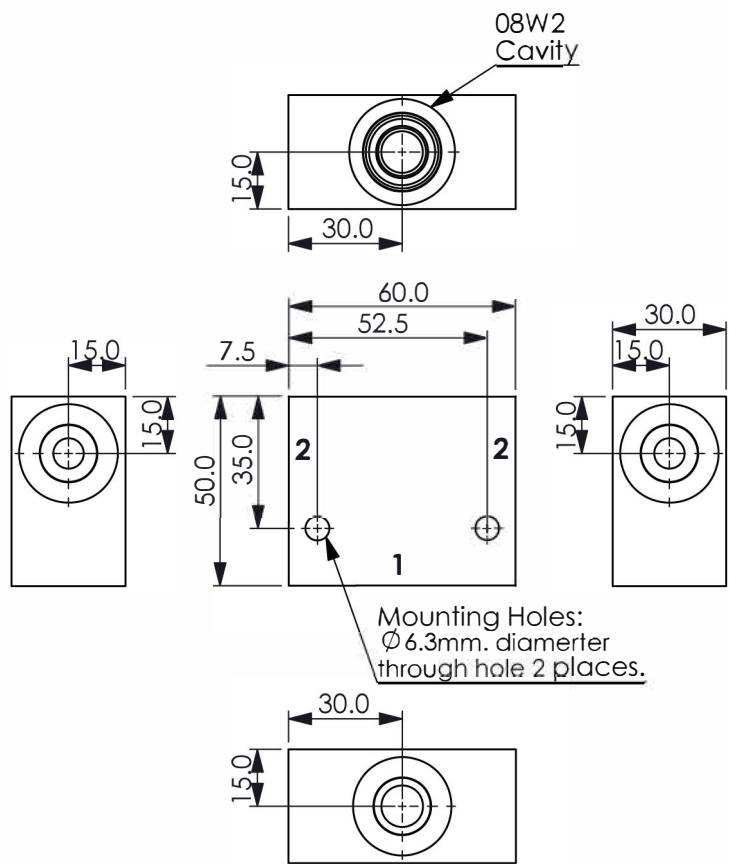


Rohrleitungsgehäuse

Ordering Code: ML-08W2-X-Y 02-Z

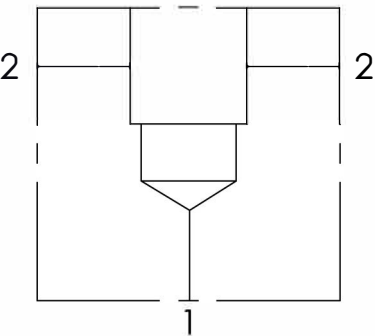

UNIT:mm



TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
Ductile Iron Body Pressure Rating: 350 bar

Cavity:

Refer to 08W2

* Refer to Winner Cartridge Valves Catalog.

| | |
|--------------|-------------------------|
| Aluminum | 0.22 kg(WITHOUT VALVES) |
| Ductile Iron | 0.55 kg(WITHOUT VALVES) |

* If you need the special specification. Please contact us.

PORT SIZE

| X | PORT | PORT | |
|-----|--------|--------|--|
| | 1 | 2 | |
| G03 | G 3/8" | G 3/8" | |

Y BODY MATERIAL

A HIGH-STRENGTH ALUMINUM

Z CARTRIDGE VALVES SELECTION

| | | |
|------|--|--|
| | WITHOUT VALVE | |
| RD0A | RD08W20AL(20LPM,80-210bar) | |
| EP01 | EP08W2A01N05 , 40LPM,350bar (NORMALLY CLOSED,WITHOUT COIL) | |
| EP02 | EP08W2A02N05 , 40LPM,350bar (NORMALLY OPEN,WITHOUT COIL) | |

COIL MUST BE ORDERED SEPARATELY (REFER TO EC-04W-X-Y-Z)

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and manifolds assembly in accordance with request function (flow 、 pressure 、 ... etc.)