


SCP 012-108 DIN

-
- A detailed view of a hydraulic pump assembly. The pump body is made of cast iron and features a mounting flange with four bolt holes. A drive shaft with a splined end is visible, connected to the pump. The assembly is shown from a side-on perspective, highlighting its compact design and industrial appearance.

		012	017	025	034	040	047	056	064	084	108
Durchfluss (l/min)	bei 500 U/min	6.3	8.5	12.7	17.1	20.6	23.5	28.0	31.8	41.5	54.0
	bei 1'000 U/min	12.6	17.0	25.4	34.2	41.2	47.1	56.0	63.6	83.6	108.0
	bei 1'500 U/min	18.9	25.5	38.1	51.3	61.8	70.6	84.0	95.4	125.4	162.0
Fördervolumen (cm ³ /U)		12.6	17.0	25.4	34.2	41.2	47.1	56.0	63.6	83.6	108.0
Drehzahl (U/min)	kontinuierlich	2300	2300	2300	2300	1900	1900	1900	1900	1500	1500
	kurzzeitig	3000	3000	3000	3000	2500	2500	2500	2500	2000	2000
Max. Betriebsdruck (bar)		400	400	400	400	400	400	400	400	400	400
Drehmoment (Nm)		6.9	6.9	7.4	7.4	13	13	13	13	21	21
Drehrichtung		links (L) oder rechts (R)									

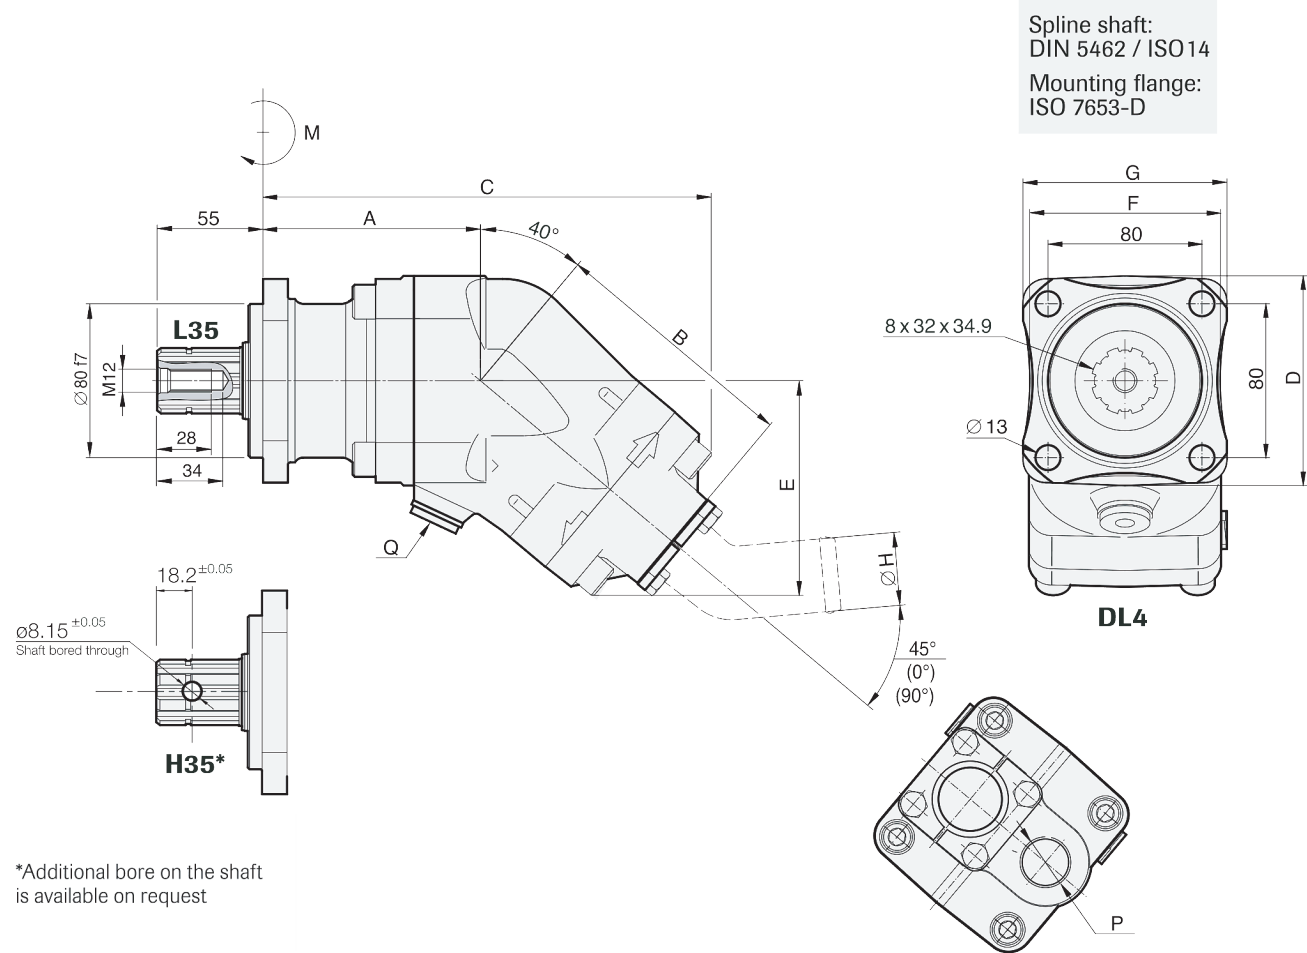

Masse (mm)	012	017	025	034	040	047	056	064	084	108
A	97	97	97	97	113	113	113	113	123	123
B	112	112	112	112	130	130	130	130	147	147
C	202	202	202	202	228	228	228	228	259	259
D	99	99	99	99	109	109	109	109	126	126
E	97	97	97	97	109	109	109	109	126	126
F	89	89	89	89	99	99	99	99	115	115
G	97	97	97	97	106	106	106	106	123	123
H	38	38	38	38	38	38	38	38	50	50
P (ISO G)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	1	1
Q (ISO G)	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2