

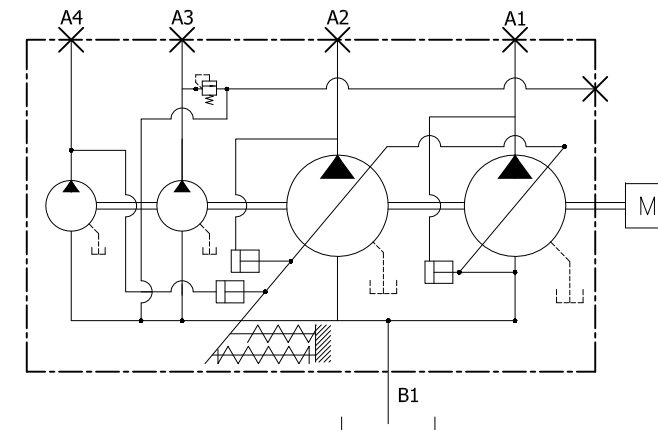
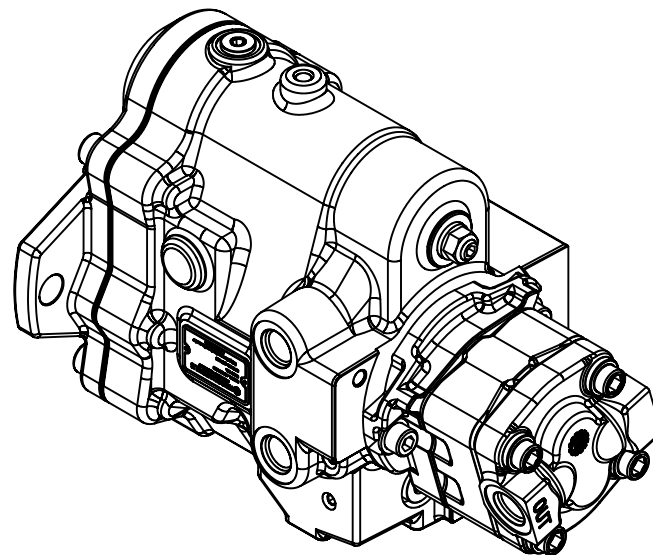





HYDRAULIC CIRCUIT FOR PRINCIPLE

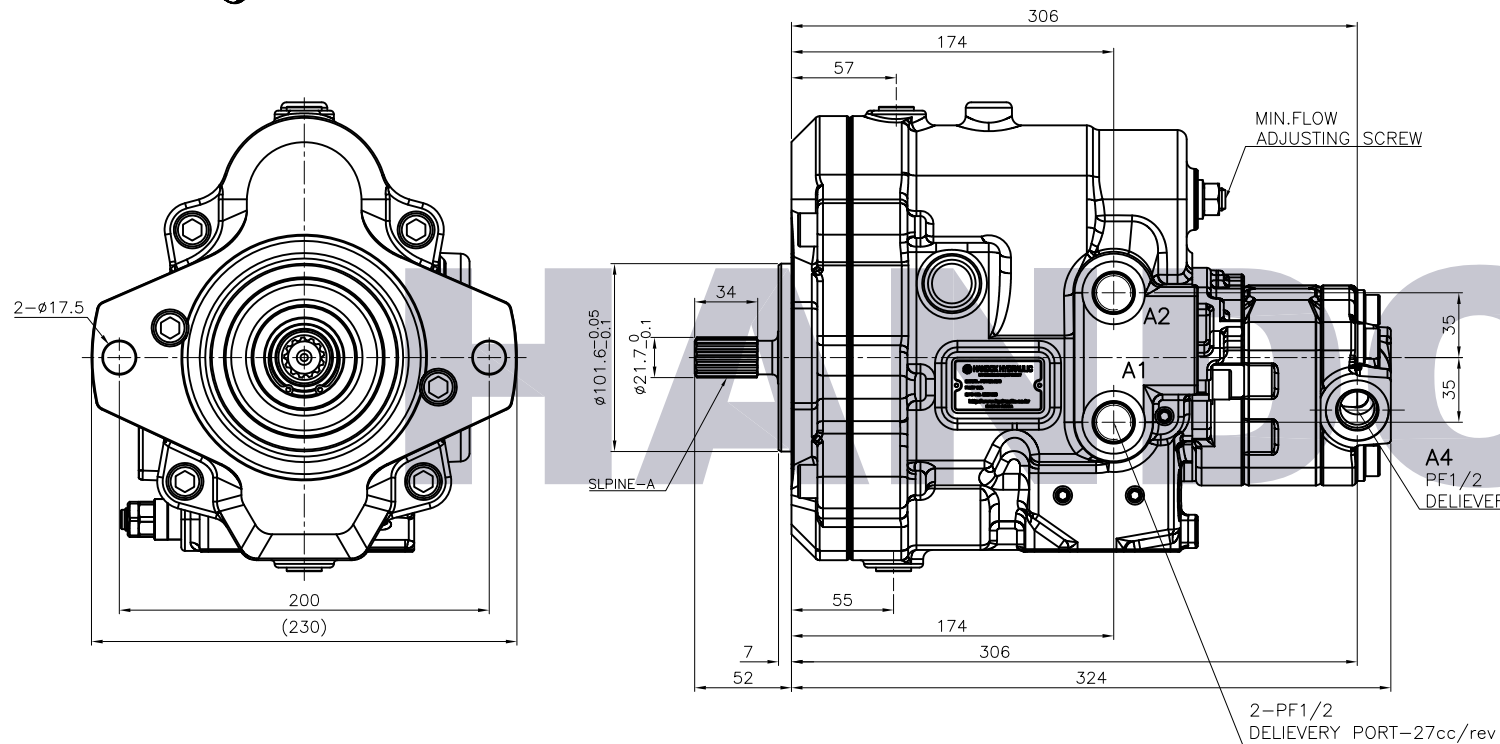

SAE J518-2"
FLANGE MOUNTING FACE
FOR B1-SUCTION PORT

*SCALE : 1/1

INVOLUTE SPLINE 오목표 -A	
치 수 Number of Teeth	13
기온피치원지름 Pitch Diameter	20.638
모 듈 Module	16/32
압력각 Pressure Angle	30°
규 격 Standard	SAE

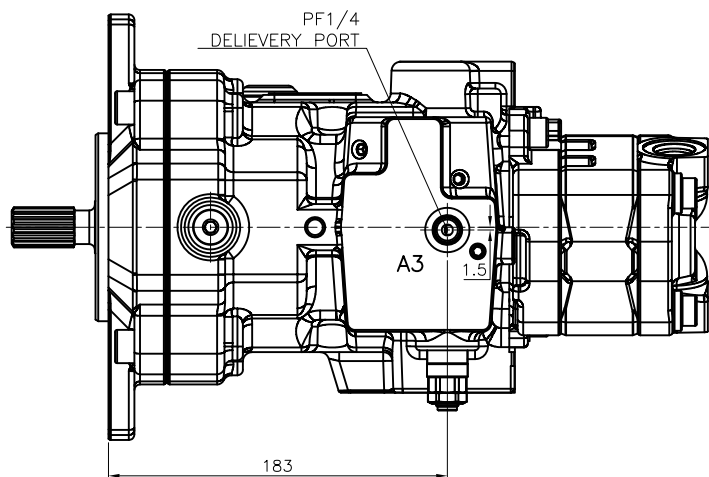

OPERATING SPECIFICATIONS


1. MAX. DISPLACEMENT : (22.4~27.9cm³) X 2
2. RATED SPEED : 2,400rpm
3. MAX WORKING PRESSURE : 24.5(250)MPa(kgf/cm²)

***PILOT PUMP**

- 1. MAX.DISPLACEMENT :3.5 / 4.9 / 5.1cm³**
2. MAX WORKING PRESSURE : 4.9(50)MPa(kgf/cm²)

***GEAR PUMP**

1. MAX.DISPLACEMENT :7.0 / 9.4 / 11.9 / 14.3 / 16.8 / 19.2cm^3
2. MAX WORKING PRESSURE : 20.6(210)MPa(kgf/cm^2)

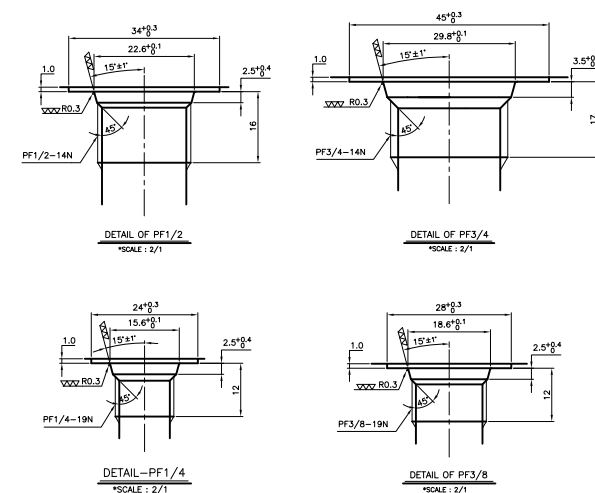

NO		제 명 - PART NAME		재료 - MATERIAL		중 량 - QTY/PCS - WEIGHT		비고 - REMARK	
DWG. BY		REV.	DWG. BY		REV.	APP. BY		SCALE	규격 - MODEL
						PSVD2- 27			
						품 명 - PART NAME			
일 자 - DATE : 2015.03.03		단 위 - UNIT : mm		MAIN PUMP					
						도면 크기 DWG NO. A1 PSVD2-27-G1SP-XX-06-01			