

(Single ball shuttle valve with signal at port 2)

Ordering Code: **LS-11A-X-Y-Z**

22.2 Hex. (7/8 inch)

In ③

M20x1.5

Out ②


In ①

30


Locating Shoulder

35.1

UNIT:mm

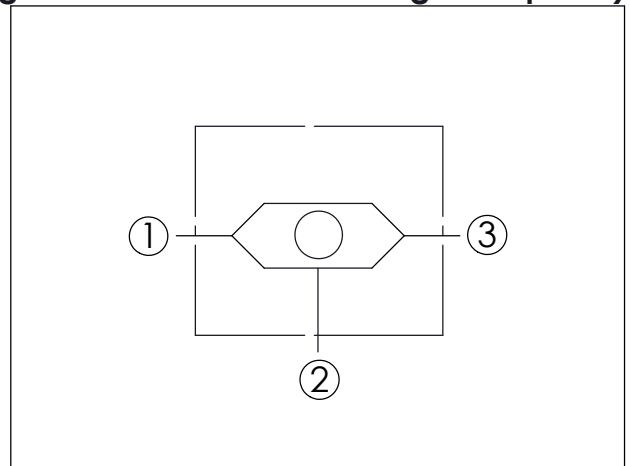

TECHNICAL DATA		
Max. pressure:	350	bar
Rated flow:	10	l/min
Cavity-Tooling:	11A-3	
Installation torque:	40-50	Nm
Weight:	0.1	kg

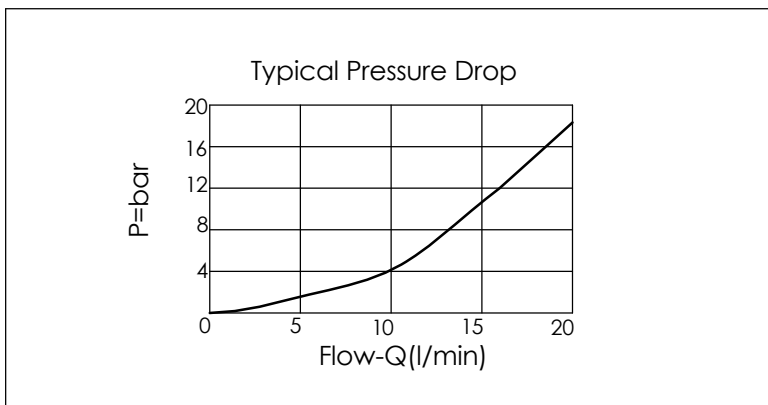

X	OPERATION	
30	Signal at Port 2 (Standard)	

Y	SPRING	
N	Non-Spring	

Z	OPTION	
N	Non-adjustable	