




ISO 03 COVER MANIFOLD

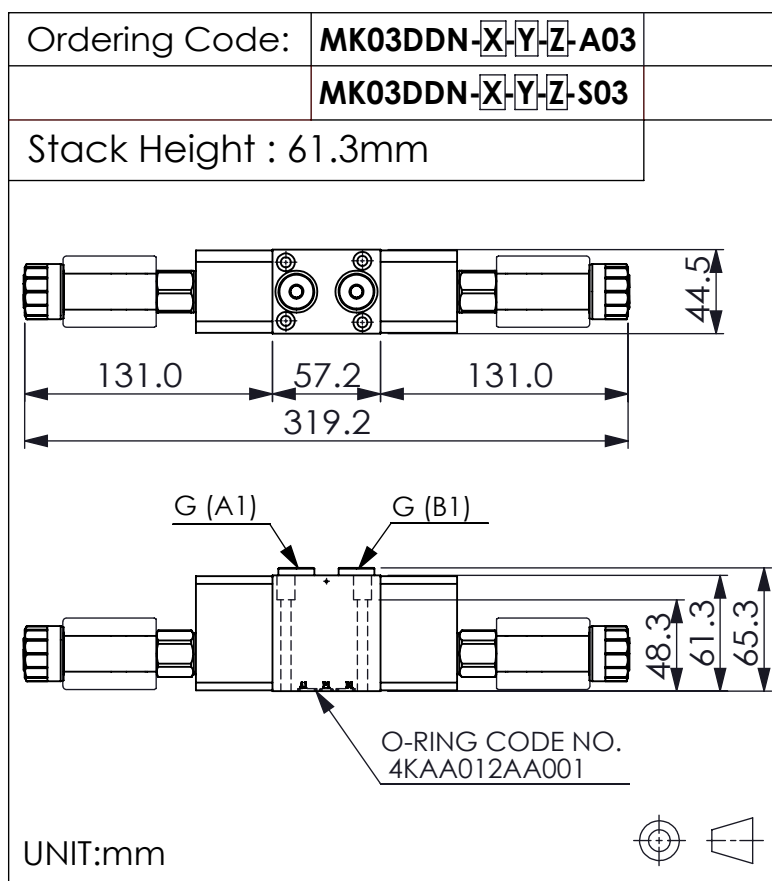

TYPICAL CIRCUIT:

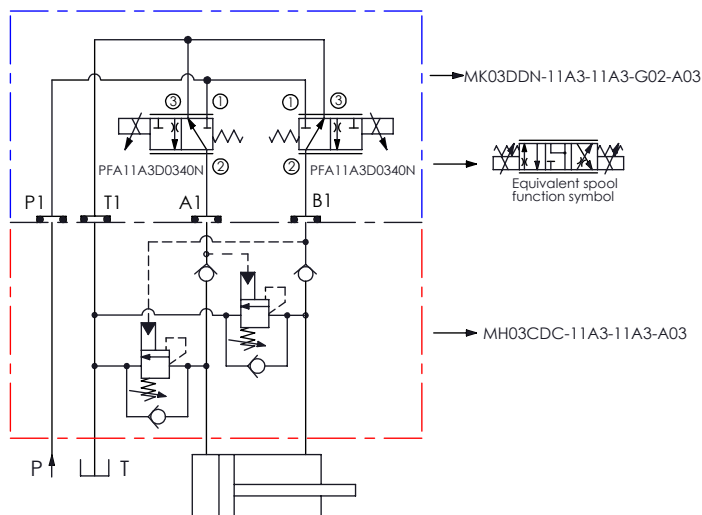

Y	SELECTION FOR B PORT CONTROL (REFER TO PFA11A-X-Y-Z)
11A3	CAVITY ONLY(WITHOUT VALVE)
PFA06	PFA11A3D0061N(0.4~6.1LPM)
PFA15	PFA11A3D0150N(0.4~15LPM)
PFA23	PFA11A3D0230N(0.4~23LPM)
PFA34	PFA11A3D0340N(0.4~34LPM)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-19A-X-Y-Z)	

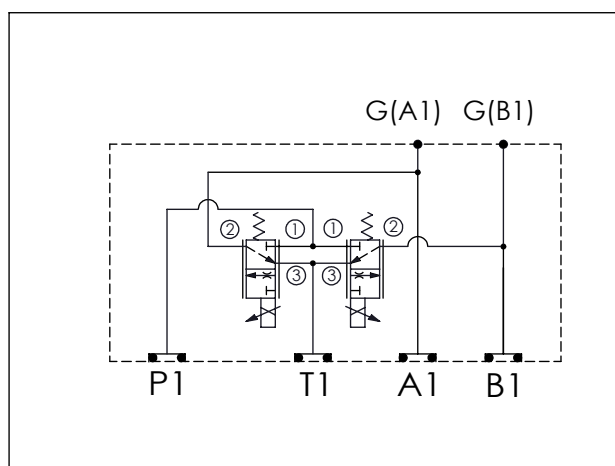

TECHNICAL DATA

Aluminum (A03)	
Body Pressure Rating:	210 bar
Ductile Iron(S03)	
Body Pressure Rating:	350 bar

Rated flow: 34 l/min

Cartridge Valve:
Refer to PFA11A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.85 kg(WITHOUT VALVES) 1.6 kg(INCLUDE VALVES WITHOUT COIL)
Ductile Iron	2.5 kg(WITHOUT VALVES) 3.25 kg(INCLUDE VALVES WITHOUT COIL)

* If you need the special specification.
Please contact us.

X	SELECTION FOR A PORT CONTROL (REFER TO PFA11A-X-Y-Z)
11A3	CAVITY ONLY(WITHOUT VALVE)
PFA06	PFA11A3D0061N(0.4~6.1LPM)
PFA15	PFA11A3D0150N(0.4~15LPM)
PFA23	PFA11A3D0230N(0.4~23LPM)
PFA34	PFA11A3D0340N(0.4~34LPM)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-19A-X-Y-Z)	

Z	PORT SIZE	
	PORTS	
	G(A1,B1)	
G02	G 1/4"(Metric)	
N02	NPT 1/4"(U.S. Units)	
S04	SAE 4	