
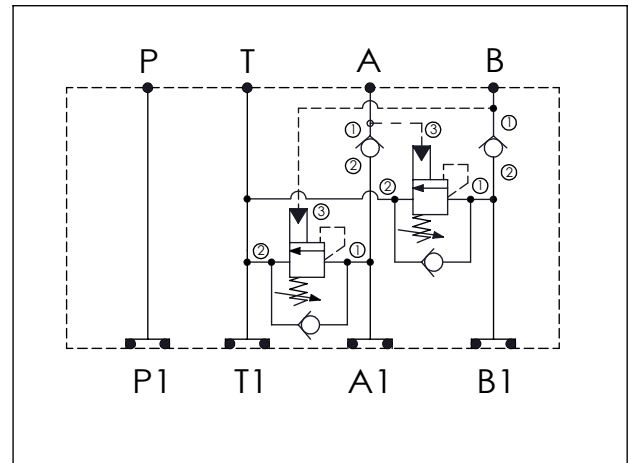


ISO 03 SANDWICH MANIFOLD

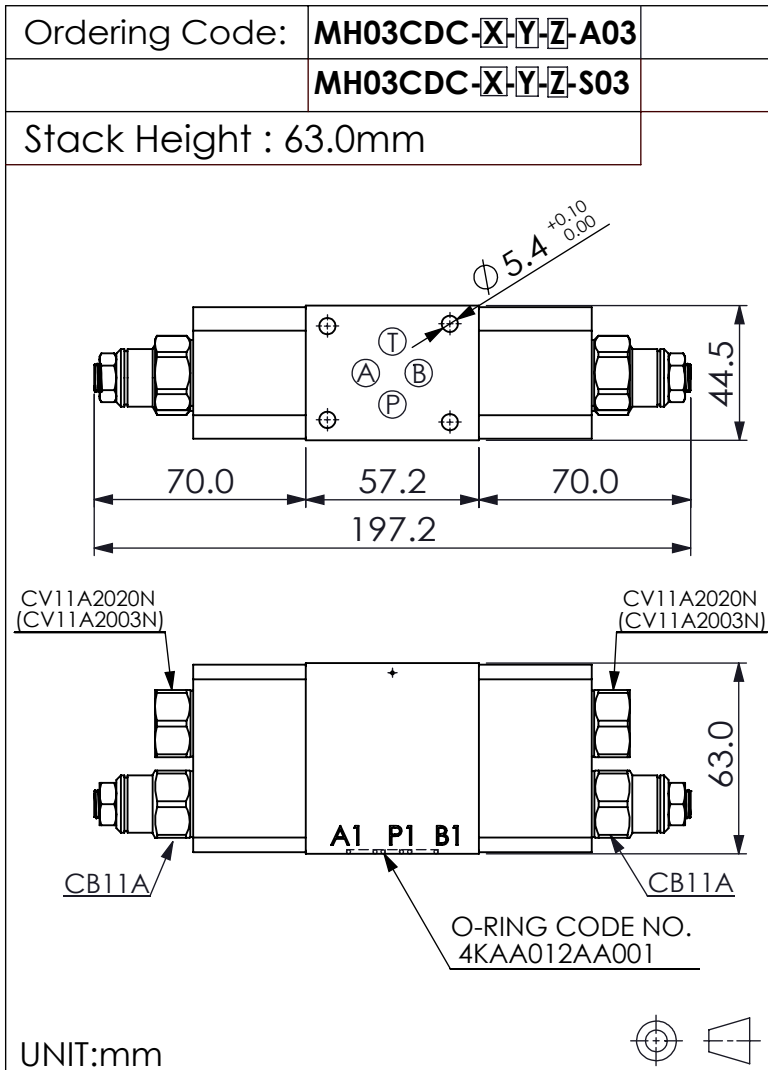

TECHNICAL DATA

Aluminum (A03)	
Body Pressure Rating:	210 bar
Ductile Iron(S03)	
Body Pressure Rating:	350 bar
Rated flow:	40 l/min

Cartridge Valve:


Refer to CV11A-X-Y-Z

CB11A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.75 kg(WITHOUT VALVES) 1.35 kg(INCLUDE VALVES)
Ductile Iron	2.14 kg(WITHOUT VALVES) 2.74 kg(INCLUDE VALVES)

* If you need the special specification.
Please contact us.

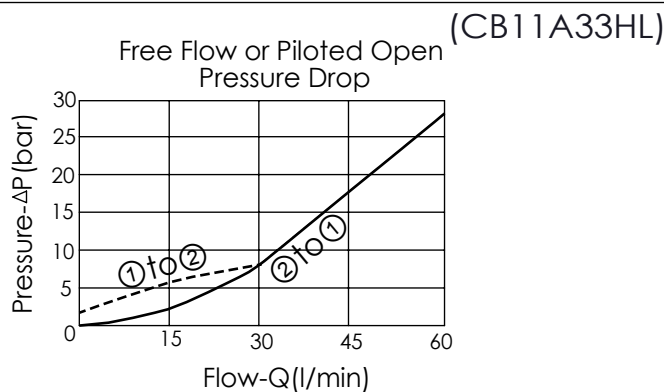

X	SELECTION FOR CHECK VALVE	
CV20	CV11A2020N (80LPM,2.0bar) x2 PCS (STANDARD)	
CV03	CV11A2003N (80LPM,0.3bar) x2 PCS	
11A3	CAVITY ONLY(WITHOUT VALVE)	

Y	SELECTION FOR A PORT CONTROL	
11A3	CAVITY ONLY(WITHOUT VALVE)	
CB3H	CB11A33HL (60LPM , 70-280bar)	

Z	SELECTION FOR B PORT CONTROL	
11A3	CAVITY ONLY(WITHOUT VALVE)	
CB3H	CB11A33HL (60LPM , 70-280bar)	