
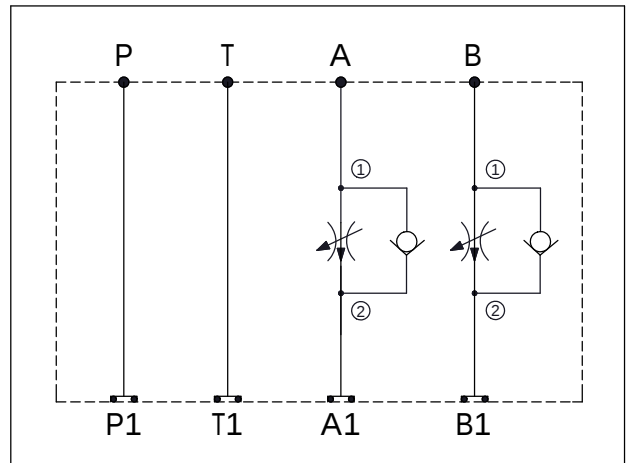


## ISO 03 SANDWICH MANIFOLD

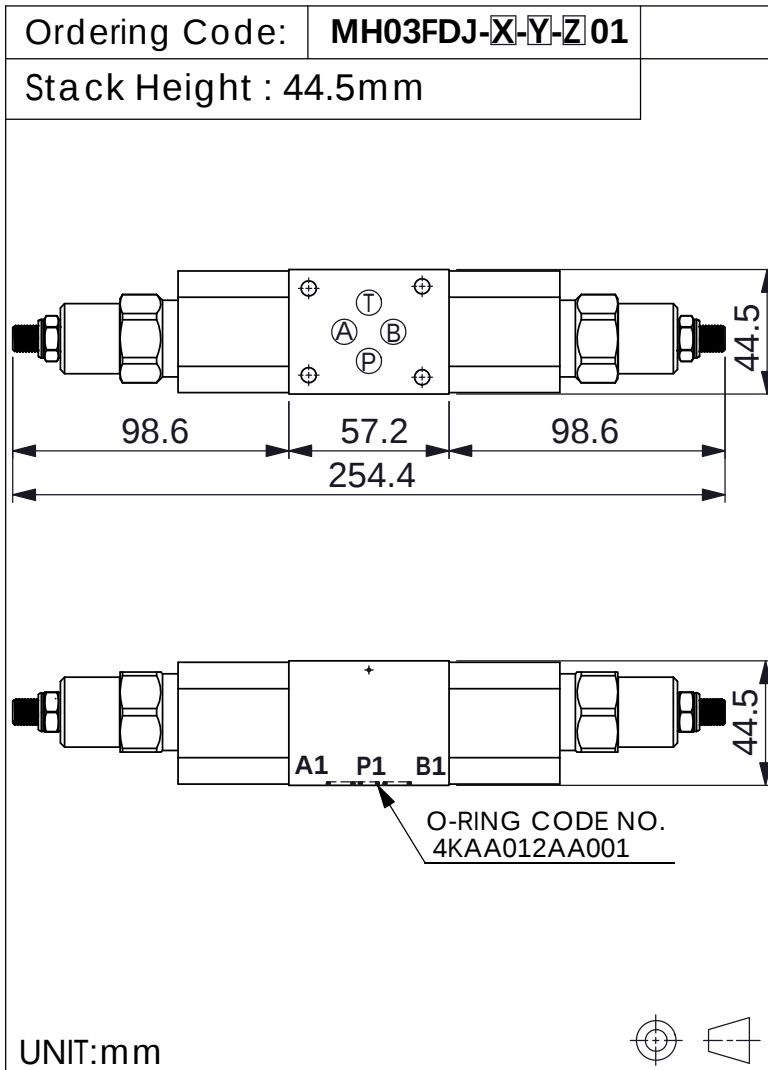

### TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar  
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min  
 (Pressure Compensated)

Cartridge Valve:  
 Refer to FR5A-X-Y-Z  
 \* Refer to Winner Cartridge Valves Catalog.

|              |                                                    |
|--------------|----------------------------------------------------|
| Aluminum     | 0.53 kg(WITHOUT VALVES)<br>1.07 kg(INCLUDE VALVES) |
| Ductile Iron | 1.53 kg(WITHOUT VALVES)<br>2.07 kg(INCLUDE VALVES) |

\* If you need the special specification.  
 Please contact us.

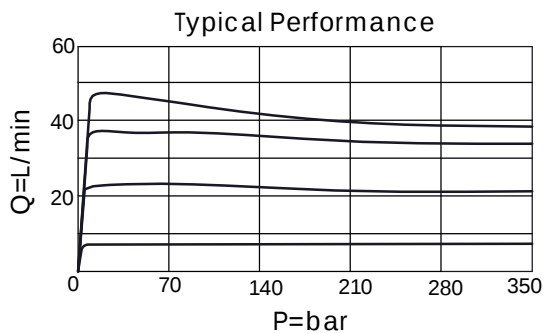

**X**

**SELECTION FOR A PORT CONTROL**

**5A2**

CAVITY ONLY(WITHOUT VALVE)

**FR0A**

FR5A20AL(0.4-45LPM)

**Y**

**SELECTION FOR B PORT CONTROL**

**5A2**

CAVITY ONLY(WITHOUT VALVE)

**FR0A**

FR5A20AL(0.4-45LPM)

**Z**

**BODY MATERIAL**

**A**

HIGH-STRENGTH ALUMINUM

**S**

DUCTILE IRON