



STANDARD MANIFOLD LINE MOUNT BODIES

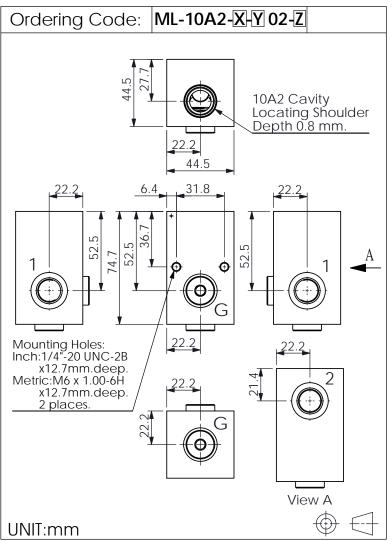



TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Cavity:

Réfer to 10A2

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.32 kg(WITHOUT VALVES)
Ductile Iron	0.94 kg(WITHOUT VALVES)

* If you need the special specification. Please contact us.

	PORT SIZE			
X	PORTS	PORT		
	1,2	G		
G03G	G 3/8"	G 1/4"		
G04G	G 1/2"	G 1/4"		
S06G	SAE 6	1/4"NPT		
S08G	SAE 8	1/4"NPT		
\$10G	SAE 10	1/4"NPT		

Υ	BODY MATERIAL HIGH-STRENGTH ALUMINUM	
Α		
S	DUCTILE IRON	

Z	CARTRIDGE VALVES SELECTION	
	WITHOUT VALVE	
RPOA	RP10A20AL(95 LPM,7~210 bar)	
RD5A	RD10A25AL(95 LPM,35~210 bar)	

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and maniflods assembly in accordance with request function (flow \ pressure \ \ ... etc.)

Rev.140409 M.10A.301