
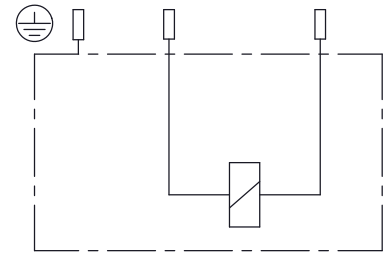


SOLENOID OPERATED VALVES

Continuous Duty Coils-ED 100%

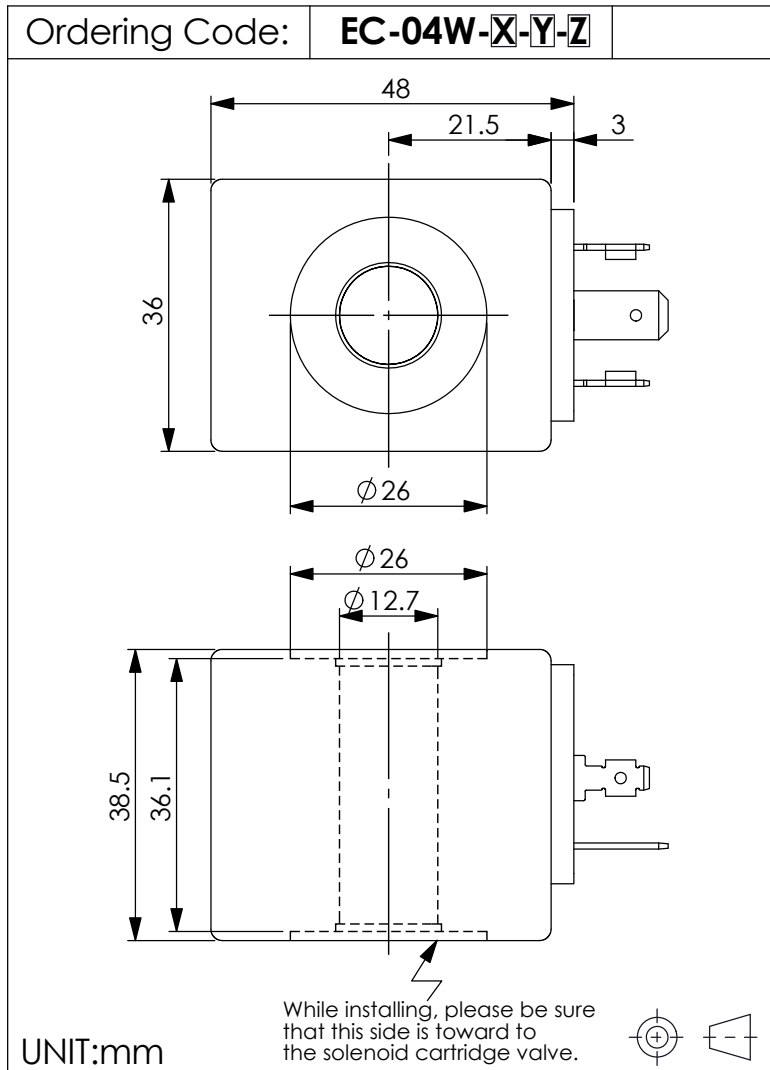

TECHNICAL DATA

Weight: 0.22 kg

HEAT INSULATION CLASS H:
356°F (180°C)

Ambient temperature range:
-22+140°F (-30+60°C)

Available on request:
Different Voltages -
Different connectors.

Inlet voltage fluctuations must not exceed $\pm 10\%$ of nominal voltage to obtain correct operation and long life of coils.

CE approved

X	Power (W)		Y	Connections	
200	20 Watt.		H	DIN43650-ISO4400	

Z	Voltage (V)	Resistance (Ω)	Current (A)		
	Nominal	20~25 °C	Cold Coil	Hot Coil	
C	24V RAC	23.2 $\pm$ 7 %	0.95	0.63	
B	110V RAC	470 $\pm$ 7 %	0.19	0.14	
A	220V RAC	1910 $\pm$ 7 %	0.09	0.07	
F	10V DC	5.0 $\pm$ 8 %	1.98	1.28	
E	12V DC	7.5 $\pm$ 7 %	1.66	1.06	
M	14V DC	9.3 $\pm$ 7 %	1.48	0.96	
N	20V DC	20 $\pm$ 7 %	0.99	0.65	
D	24V DC	28.6 $\pm$ 7 %	0.88	0.53	
G	26V DC	34.2 $\pm$ 7 %	0.77	0.52	
J	28V DC	39.2 $\pm$ 7 %	0.71	0.50	
L	36V DC	64 $\pm$ 7 %	0.56	0.36	
H	48V DC	110 $\pm$ 7 %	0.45	0.28	