
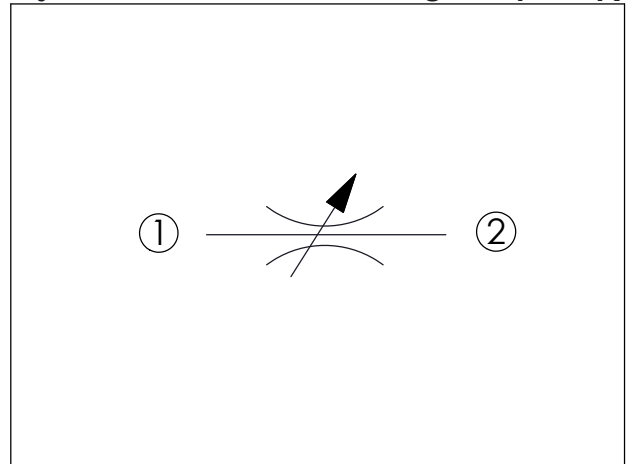



FLOW CONTROL VALVE

(Fully Adjustable Needle Valve, High Capacity)

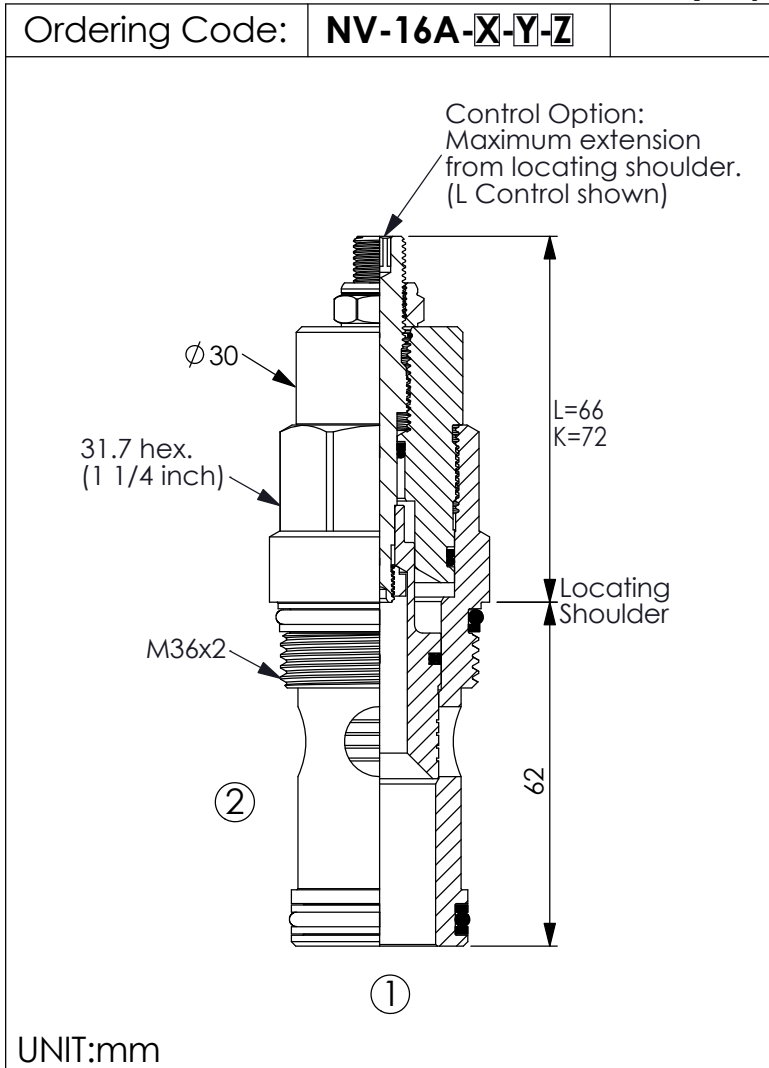

TECHNICAL DATA

Max. operating pressure:	350 bar
Rated flow:	340 l/min ($\Delta P=7$ bar) See Performance Chart
Cavity-Tooling:	16A-2
Installation torque:	200-215 Nm
Weight:	0.57 kg

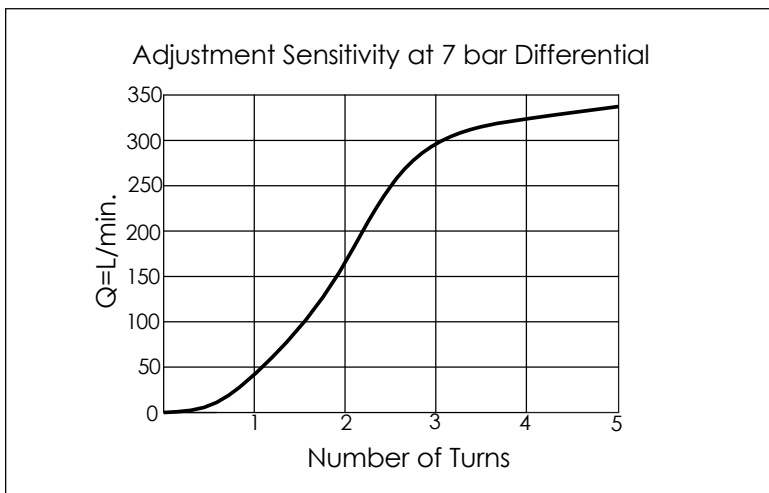

X	OPERATION	
28	Fully Adjustable Needle Valve	

Y	MAXIMUM NOMINAL ORIFICE DIAMETER	
175	ϕ 17.5 mm	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob.	
T	Three-winged Handknob Kit.	