

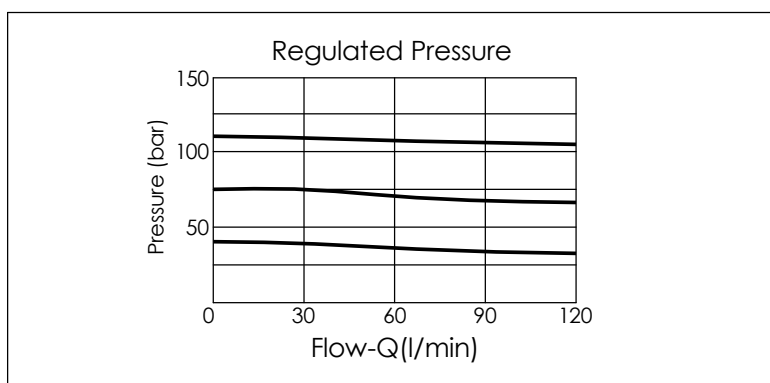


REDUCING VALVE (Pilot Operated Reducing)

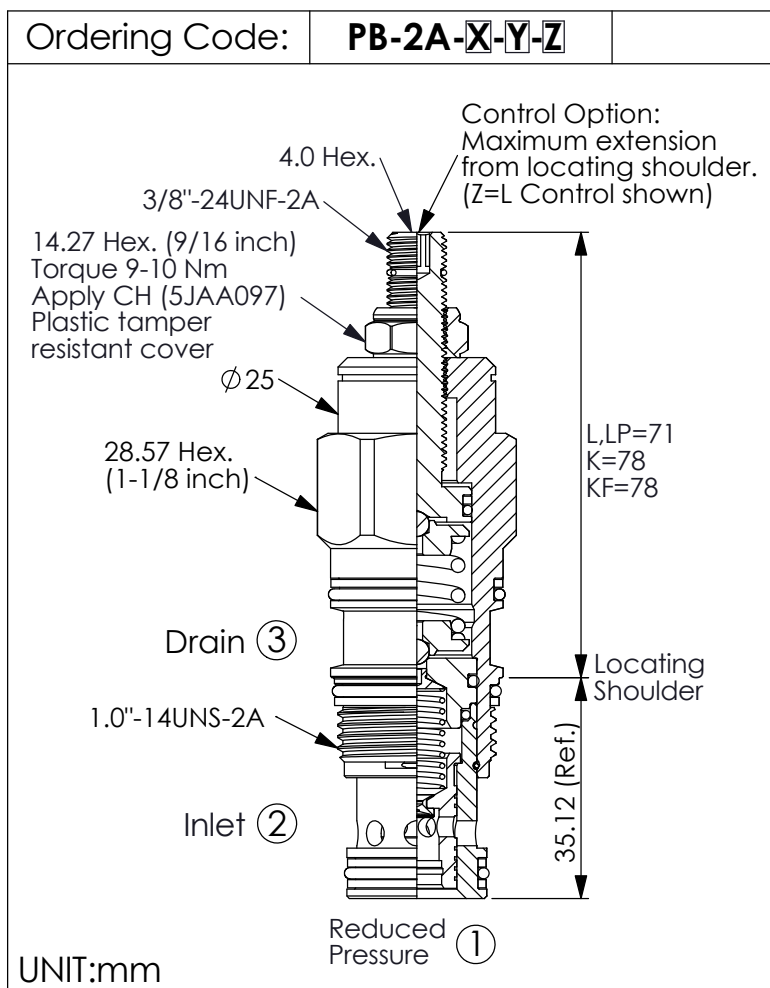

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	7-210 bar (14 bar Standard Setting) Maximum Differential=210 bar	
B	3.5-105 bar (14 bar Standard Setting) Maximum Differential=210 bar	
C	10.5-420 bar (14 bar Standard Setting)	
D	1.7-55 bar (14 bar Standard Setting) Maximum Differential=140 bar	
E	1.7-28 bar (14 bar Standard Setting) Maximum Differential=140 bar	
H	2-210 bar (14 bar Standard Setting) Maximum Differential=210 bar	
* J	1.7-105 bar (14 bar Standard Setting)	
N	4-55 bar (14 bar Standard Setting) Maximum Differential=140 bar	
Q	4-28 bar (14 bar Standard Setting) Maximum Differential=140 bar	
* S	1.7-14 bar (7 bar Standard Setting)	
W	10.5-315 bar (14 bar Standard Setting)	

* Maximum differential pressure...Any technical questions, please feel free to consult with our sales dept.

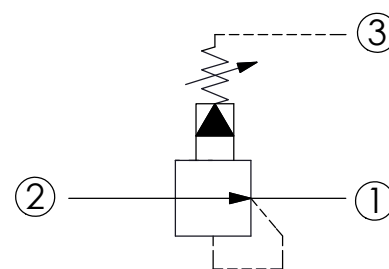

TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	80	l/min
Cavity-Tooling:	2A-3	
Installation torque:	60-70	Nm
Weight:	0.29 (Z=L,LP) 0.30 (Z=KF)	kg
Control Pilot Flow	(0.16-0.25 L/min.)	

X	OPERATION	
30	Standard Type	
35	Impact Resistant Type (Without Filter)	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
KF	Handknob with Panel Mount.	
BA	Handknob and aluminum locknut.	