




REDUCING/RELIEVING VALVE

(Direct Acting)

Ordering Code: **PD-11A-X-Y-Z**

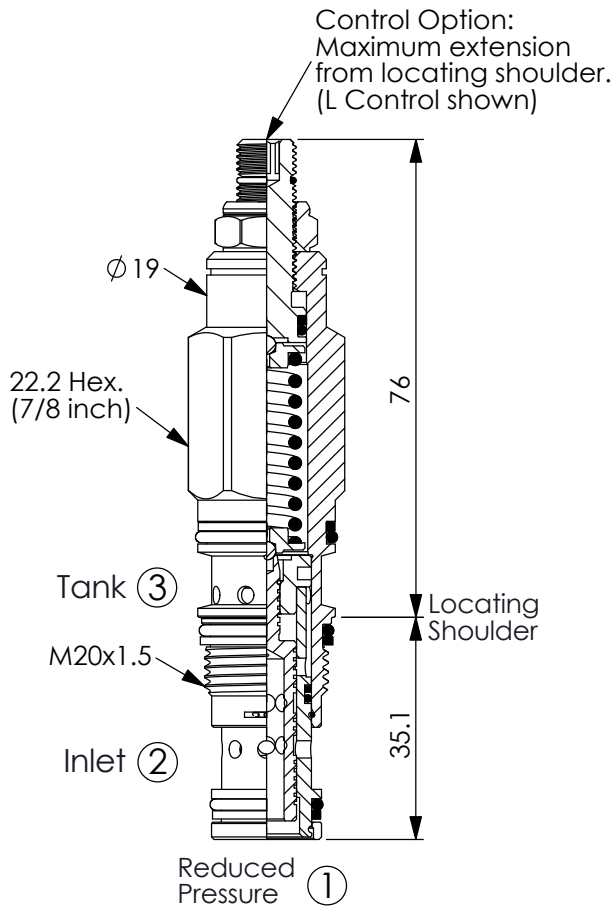

UNIT:mm

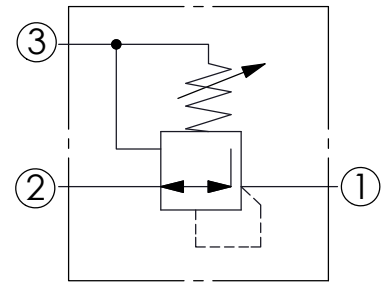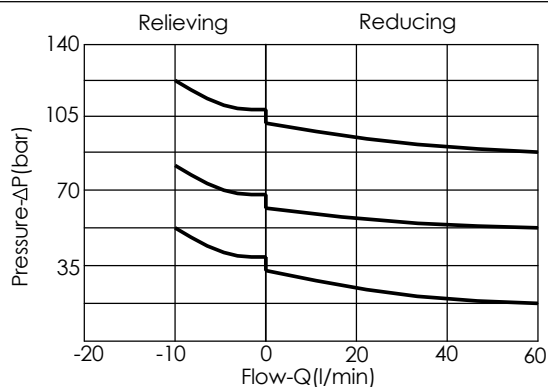

TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	40	l/min
Cavity-Tooling:	11A-3	
Installation torque:	40-50	Nm
Weight:	0.19	kg

X OPERATION

30 Standard Type

Maximum Leakage (33 cc/min./70 bar)

Y SPRINGS

ADJUSTMENT RANGES

A	35 to 210 bar (50 bar Standard Setting)
B	3.5 to 105 bar (14 bar Standard Setting)
D	1.7 to 55 bar (14 bar Standard Setting)
E	1.7 to 28 bar (14 bar Standard Setting)
H	7 to 210 bar (50 bar Standard Setting)
S	1.7 to 14 bar (7 bar Standard Setting)
W	50 to 315 bar (70 bar Standard Setting)

Z OPTIONS

L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
C	Stainless Steel Tamper Resistant Cover.	