

### TECHNICAL DATA

Max. Operating pressure: 350 bar


Rated flow: 480 l/min

Cavity-Tooling: 19A-3

Installation torque: 465-500 Nm

Weight: 1.43 kg

Will accept maximum pressure at port 2; suitable for use in cross port relief circuits. If used in cross port relief circuits, consider spool leakage.

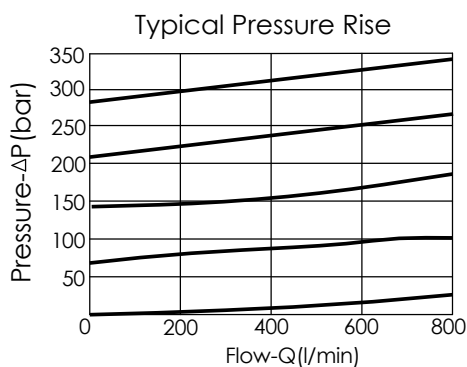

### X OPERATION

**30** Standard Type


Response Time-Typical (10 ms)

Maximum Leakage (82 cc/min./70 bar)


Y	SPRINGS	
	ADJUSTMENT RANGES	
<b>A</b>	7 to 210 bar (70 bar Standard Setting)	
<b>B</b>	3.5 to 105 bar (70 bar Standard Setting)	
<b>C</b>	10.5 to 420 bar (70 bar Standard Setting)	
<b>D</b>	1.7 to 55 bar (28 bar Standard Setting)	
<b>E</b>	1.7 to 28 bar (14 bar Standard Setting)	
<b>H</b>	2 to 210 bar (70 bar Standard Setting)	
<b>W</b>	10.5 to 315 bar (70 bar Standard Setting)	

### Z OPTIONS

**L** Leakproof hex. socket screw.



**K** Handknob with Lock Knob.



**C** Stainless Steel Tamper Resistant Cover.

